


# HUSKY 1690

## HIGH VOLUME AUTOMATIC SHUT-OFF NOZZLE

**Husky Model 1690 provides 100 GPM; 30% lighter than similar nozzles**

- Model 1690 is designed with extra large hand opening to accommodate gloves or mittens.
- Check valve is in nozzle body, not the spout, for inexpensive, fast spout replacement.
- Self-adjusting stem packing. No field adjustment is required.
- Automatic shut-off, with dual poppets for easy opening.
- Two position hold-open latch.
- Right angle design allows nozzle to "fit" close to walls and corners.

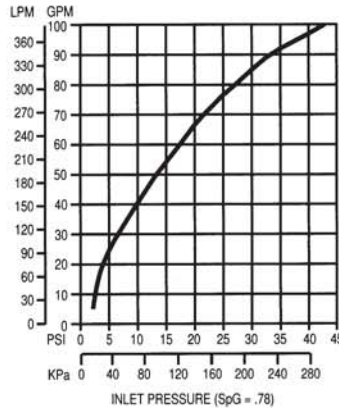

- Cast-in protective standoffs provide durability with rough usage.
- Model 1691 available for Canada. 1691 has all features listed above, plus CUL approved spout.

### SPECIFYING INFORMATION

Model Number	Fuel	Hold-open Clip	Weight Lbs. (kg.)
169010 (U.S.)	Diesel or Gasoline	yes	3.96 (1.79)
169110 (Canada)	Diesel or Gasoline	yes	3.96 (1.79)

### CONSTRUCTION

Body	Die Cast Aluminum
Disc	Viton® (Fluorocarbon)
Packing	Double O-Ring seal protected by Fiber Reinforced Teflon
Lever	One piece contoured steel with hard plastic cover
Inlet	1-1/2" NPT, BSP
Outlet	1-3/8" O.D. Spout

Viton® is a registered trademark of DuPont Dow Elastomers



Model 1690

# HUSKY 1690

## HIGH VOLUME AUTOMATIC SHUT-OFF NOZZLE

- ACCESSORIES
- FEATURES
- DIMENSIONS

SPOUTS	Model No.	Description
	4889	1-3/8" O.D. Replacement Spout for U.S. Model 1690.
	5042	1-3/8" O.D. Replacement Spout for Canadian Model 1691.

HIGH FLOW SWIVEL	Model No.	Description
	5266	1-1/2" x 1-1/2"
	5235	1-1/4" x 1-1/4"

