



Franklin Fueling Systems

APT[®] PIPEWORK SYSTEM

PIPING & CONTAINMENT SYSTEMS





Our APT® brand flexible pipework boasts controlled flexibility with Nylon 12 and mylar composition for enhanced strength and double wall protection, capable in any weather condition or site configuration. APT® pipe is offered in 1", 1 ½", 1 ¾", and 2" diameters both single wall and double wall.

INSTALLATION

With long coils and simple fittings, XP pipework can be installed quickly without specialized tools in any weather. XP pipe features a 3 ft. bend radius for all pipe diameters allowing for long runs in any layout.

RIGID ENTRY BOOTS

Rigid entry boots allow you to connect double wall pipe with flat or round containment sumps. With only one hole for installation, our boots are designed to guide XP pipe through containment for proper 90-degree entry.

COMPATIBILITY


Ideal for underground service station fuel delivery systems, in any climate, and used in both pressure and suction applications. XP pipe is compatible for remote feed and fill for heaters, boilers, and emergency generators and is UL 971 listed.

SECONDARY CONTAINMENT

XP pipe has a multi-layer construction with primary and secondary layers fitting tightly against each other to ensure additional environmental security.

MATERIAL MAKE-UP

- | | |
|-------------------------------|-------------------------------|
| 1 Interior primary (Nylon 12) | 5 Clear Mylar |
| 2 Metallized Mylar | 6 Secondary Jacket (Nylon 12) |
| 3 Nylon Braid | 7 Metallized Mylar |
| 4 Exterior Primary (Nylon 12) | 8 Scuff Guard (Nylon 12) |

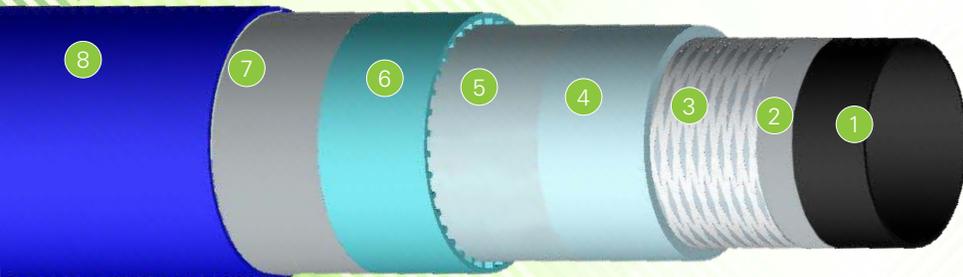

**CERTIFICATION
COMPLIANT**
UL 971 LISTED



Franklin Fueling Systems

franklinfueling.com
3760 Marsh Rd. • Madison, WI 53718, USA
Tel: +1 608 838 8786 • Fax: +1 608 838 6433
Tel: USA & Canada +1 800 225 9787 • Tel: UK +44 (0) 1473 243300
Tel: Mex 001 800 738 7610 • Tel: FR +33 (0) 1 69 21 41 41 • Tel: CH +86 10 8565 4566

© 2019 Franklin Fueling Systems. All Rights Reserved.



FFS-0719 03-19